
## Resistor Metal Element Current Sense RMC Series

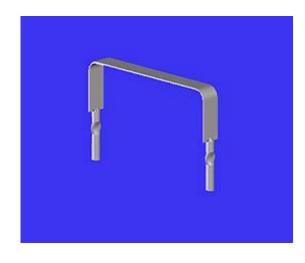

#### **KEY FEATURES**

- Resistances from 0.005 to 0.100 Ohms
- Low Inductance (<1-nH)</li>
- Tolerances to ± 1%
- Resistance Wire TCR: ± 20ppm/°C
- For Current Sensing and Shunt Applications
- All Welded Construction
- Economical Bare Metal Element
- RoHS Compliant

#### **APPLICATIONS**

- Base Station
- Current Sensing
- Power Inverters
- Lightning Pulse Survival


#### PRODUCT SUMMARY

PRODUCT SERIES (RMC)	POWER RATING @ 85°C (W)	RESISTANCE (Ω) <sup>1</sup>	TOLERANCES
J1	1	0.005, 0.01, 0.02, 0.025, 0.03, 0.04, 0.05, 0.1	± 1% / ± 5%
J2	3	0.005, 0.01, 0.015, 0.02, 0.025, 0.03, 0.04, 0.05, 0.1	± 1% / ± 5%
J3	5	0.005, 0.01, 0.015, 0.02, 0.025, 0.03, 0.05, 0.1	± 1% / ± 5%


<sup>&</sup>lt;sup>1</sup> Contact Factory for other resistances

#### **AVAILABLE OPTIONS** (Consult Factory)

Special Testing Requirements

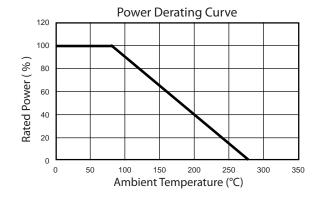

#### **HOW TO ORDER**

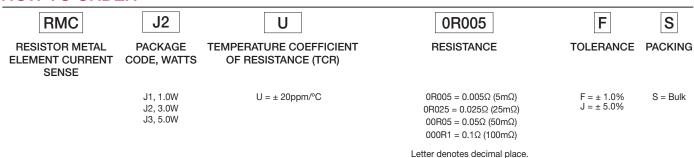


R = decimal., "K" 10<sup>3</sup>, "M" 10<sup>6</sup>
Remaining 4 digits are significant or placeholders.


Example P/N: RMCJ2U0R005FS is Resistor Metal Element Current Sense, 3.0W,  $\pm 20$ ppm/°C, 0.005 $\Omega$ ,  $\pm 1.0$ %, bulk \* For Tin/Lead coated leads, add "- Pb" to part number



# Resistor Metal Element Current Sense RMC Series

#### **MECHANICAL CHARACTERISTICS**





Package Code		J1	J2	J3
	Н	0.200 [5.08] (Tolerances) ±0.100" [±2.54mm]	1.0 [25.40mm] Max	1.0 [25.40mm] Max
	L (Tolerances) +0.040 / -0.020"[+1.02 / 0.51mm]	0.450 [11.43mm]	0.600 [15.24mm]	0.800 [20.32mm]
Dimensions Inches [mm]	D (Tolerances) ±0.002"[±0.05mm]	0.040 [1.02mm]	0.040 [1.02mm]	0.040 [1.02mm]
	W (Tolerances) +0.010 / -0.005 [+0.25 / -0.13mm]	0.065 [1.65mm]	0.065 [1.65mm]	0.065 [1.65mm]
	A (Tolerances) ±0.030"[±0.8mm]	0.125 [3.18mm]	0.125 [3.18mm]	0.125 [3.18mm]

### **PACKAGING INFORMATION**

Package Code	J1	J2	J3		
Standard Package Quantities	250 (Bulk Only)				

<sup>\*</sup> Moisture Sensitivity Level: MSL-1

This datasheet is subject to change without notice.

